

## Technical Support

- For more troubleshooting help, go to [www.tp-link.com/support/faq.asp](http://www.tp-link.com/support/faq.asp)
- To download the latest Firmware, Driver, Utility and User Guide, go to [www.tp-link.com/support/download.asp](http://www.tp-link.com/support/download.asp)
- For all other technical support, please contact us by using the following details:

### Global

Service Language: English  
Tel: +86 755 26504400  
E-mail : [support@tp-link.com](mailto:support@tp-link.com)  
Service time: 24hrs, 7days a week

### Singapore

Tel: +65 62840493  
E-mail: [support.sg@tp-link.com](mailto:support.sg@tp-link.com)  
Service time: 24hrs, 7days a week

### UK

Tel: +44 (0) 845 147 0017  
E-mail: [support.uk@tp-link.com](mailto:support.uk@tp-link.com)  
Service time: 24hrs, 7days a week

### Switzerland

Tel: +41 (0)848 800998  
(German service)  
E-mail: [support.ch@tp-link.com](mailto:support.ch@tp-link.com)  
Fee: 4-8 Rp/min, depending on rate of different time  
Service Time: Monday to Friday  
9:00 AM to 6:00 PM. GMT+1 or GMT+2 (Daylight Saving Time)

### Australia & New Zealand

Tel: AU 1300 87 5465  
NZ 0800 87 5465  
E-mail: [support@tp-link.com.au](mailto:support@tp-link.com.au)  
Service time: Monday to Friday  
9:00 AM to 9:00 PM AEST

### USA/Canada

Toll Free: +1 866 225 8139  
E-mail: [support.usa@tp-link.com](mailto:support.usa@tp-link.com)  
Service time: 24hrs, 7days a week

### Germany / Austria

Tel :+49 1805 875465 (German Service) / +49 1805 TPLINK  
E-mail: [support.de@tp-link.com](mailto:support.de@tp-link.com)  
Fee: 0.14 EUR/min from the German fixed phone network and up to 0.42 EUR/min from mobile phone.  
Service Time: Monday to Friday  
9:00 AM to 6:00 PM. GMT+1 or GMT+2 (Daylight Saving Time in Germany)  
\* Except bank holidays in Hesse

**TP-LINK®**  
The Reliable Choice

## Quick Installation Guide

2.4GHz 3dBi Wireless N Desktop Antenna


TP-LINK TECHNOLOGIES CO., LTD.

[www.tp-link.com](http://www.tp-link.com)

MODEL NO. TL-ANT2403N

# Connecting to Wireless Router

---

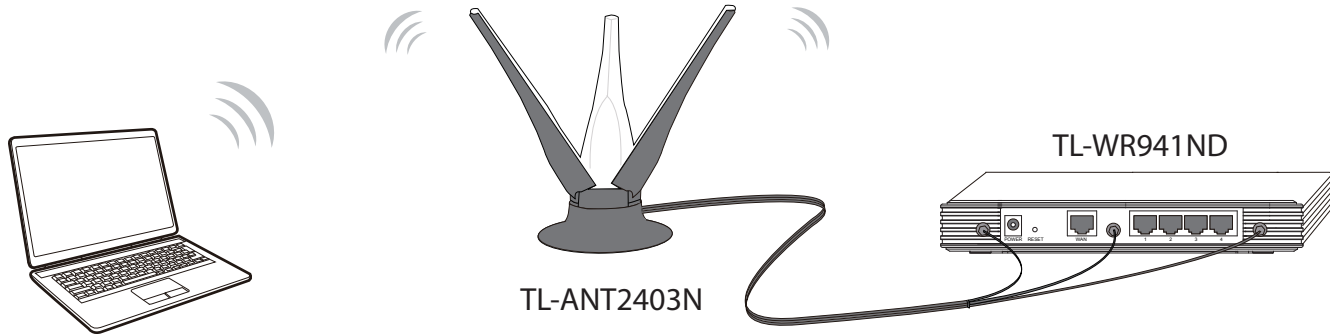

Notebook

- 1 Remove the three antennas off the back of Router. (Here we take TL-WR941ND for example.)
- 2 Connect the TL-ANT2403N Antenna to Router with RP-SMA Connectors.
- 3 Unfold the TL-ANT2403N Antenna and fix it on the provided chassis.



You are recommended to place the Antenna and the Router away from electrical devices, such as ceiling fans, home security systems, microwave or the base for a cordless phone.