

## ! IMPORTANT:

The product is powered by electricity. In order to avoid burns, fire and electric shock, please read the instructions carefully. Failure to read, thoroughly understand, and follow all instructions can result in serious personal injury, damage to equipment, or voiding of factory warranty. Should you ever have any questions or feel you require help please contact your place of purchase for assistance.

## ■ Instructions of Safety and Warnings

- Make sure that the mounting surface is strong enough to handle mounted product and equipment.
- **DO NOT EXCEED MAXIMUM LISTED WEIGHT CAPACITY.**
- Always be sure to have someone assist you or a mechanical device to lift and position heavy products safely.
- Tighten screws firmly, but do not over tighten. Over tightening can cause product damage that greatly reduces the holding power.
- Keep a clear area and distance from moving parts when using the product.
- Use only as intended. Never stand, hang or climb on the product.
- This product is intended for indoor use only.
- Any attempts to reconstruct the construction or alterations of the given power unit and control box aren't allowed.
- This product may contain small items that could be a choking hazard if swallowed. Keep children away unless the product is intended for their use and all instructions and manuals are fully reviewed and understood by them.
- Check that the product is secure and safe to use at regular intervals (at least every three months).

## ■ Other Cautions

-  Don't clean the product with water while the power is still connected.
-  Don't disassemble or replace components while the power is still connected.
-  Never operate the system with a damaged cord or plug.
-  Never operate the system if it's in moist environment or its electrical components have contact with liquids.
-  If the control box makes unusual noise or smells, switch off the mains voltage immediately.




**Disposal:** The product with this mark indicates that this product shouldn't be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the local recycle service or contact your point of purchase to withdraw the product.

# ELECTRIC SIT-STAND DESK


## Instruction Manual

**ODE1880B/W**

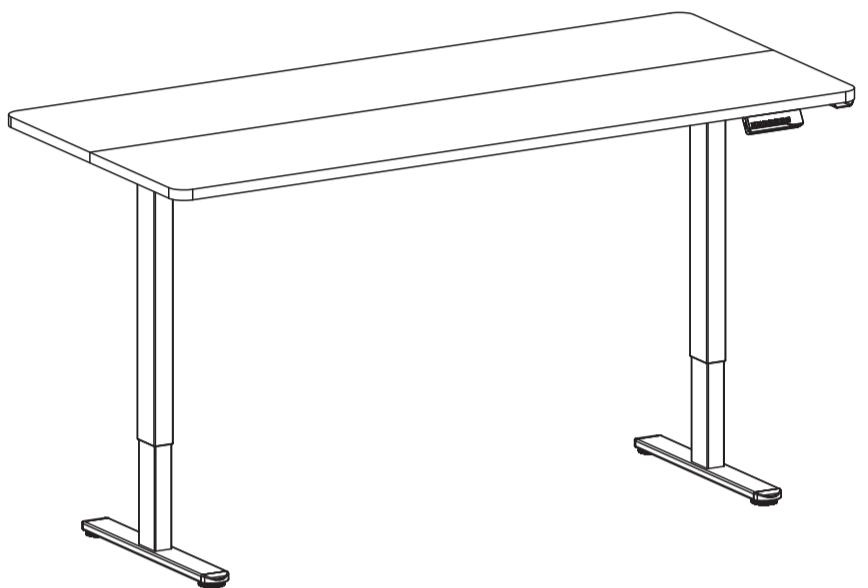

### 13. Attaching the Headphone Holder to the Desk

- Place the Headphone Holder  on the desk and mark the mounting holes for installation with a pencil.
- Drill the holes with a drill .
- Screw in the Screws  as shown.

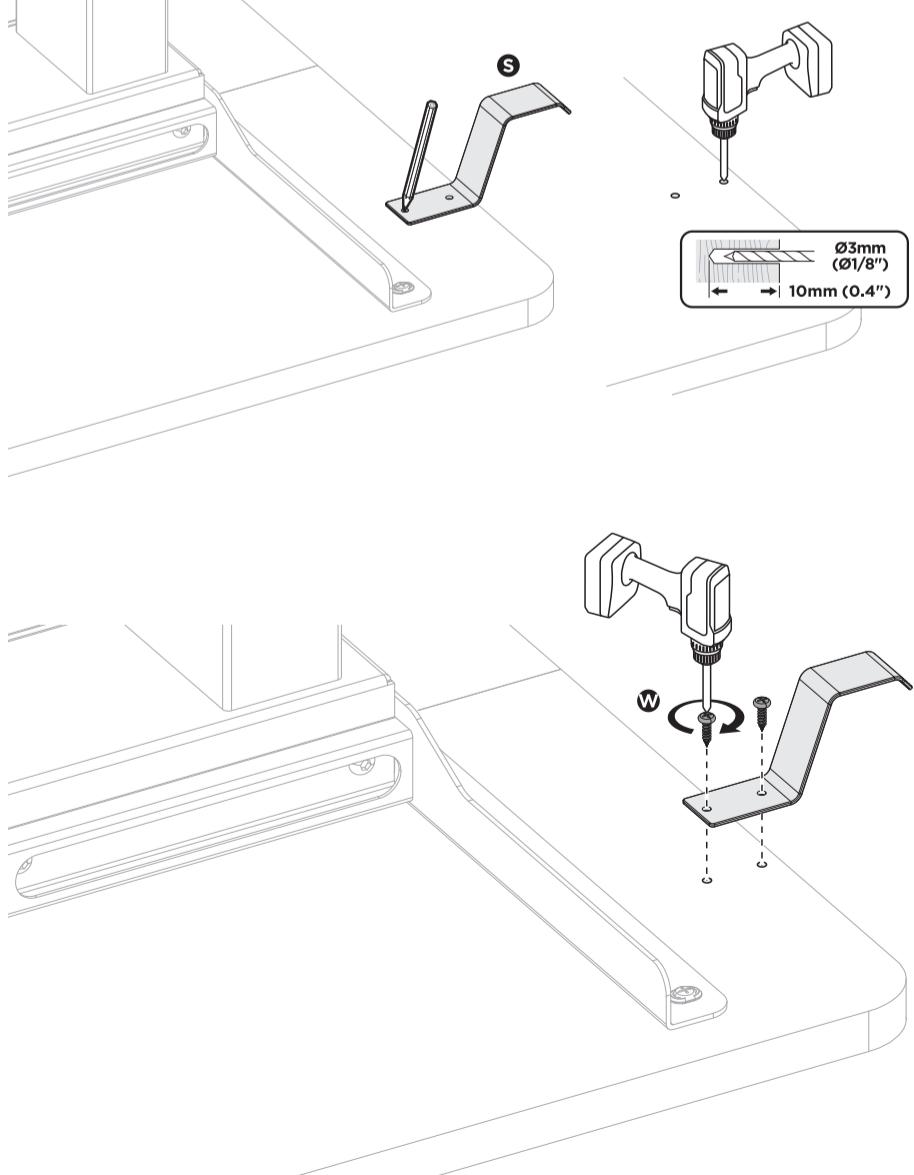


### 14. Adjusting the Desk

- Turn over the desk with the help of another person.
- If the floor isn't even, simply rotate the pad to adjust the level to make the desk stable.




**Tip:** Use a bubble level (not included) to check if the desktop is even.

**CAUTION:** At least two people are required when turning over the desk, or serious bodily injuries might occur.

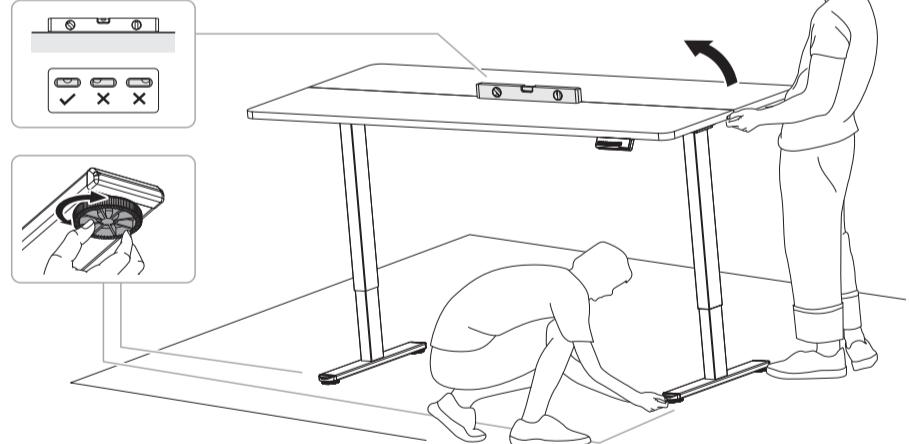

## Checklist and Installation

Please check all of the components shown in the component checklist. If any of the components are missing or damaged, contact your point of purchase for a replacement.

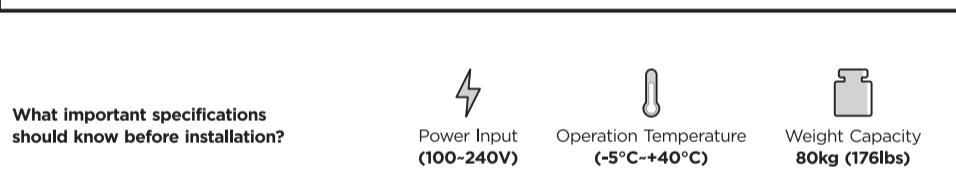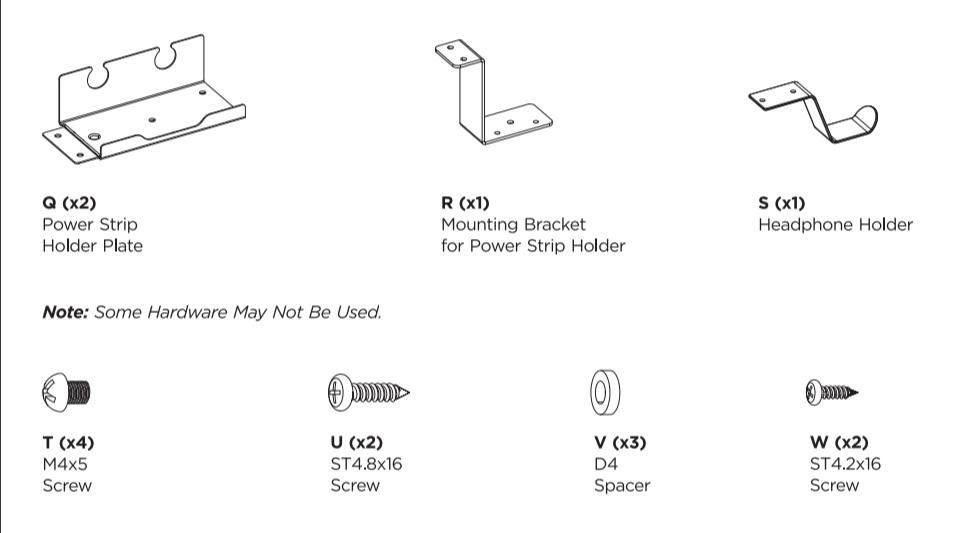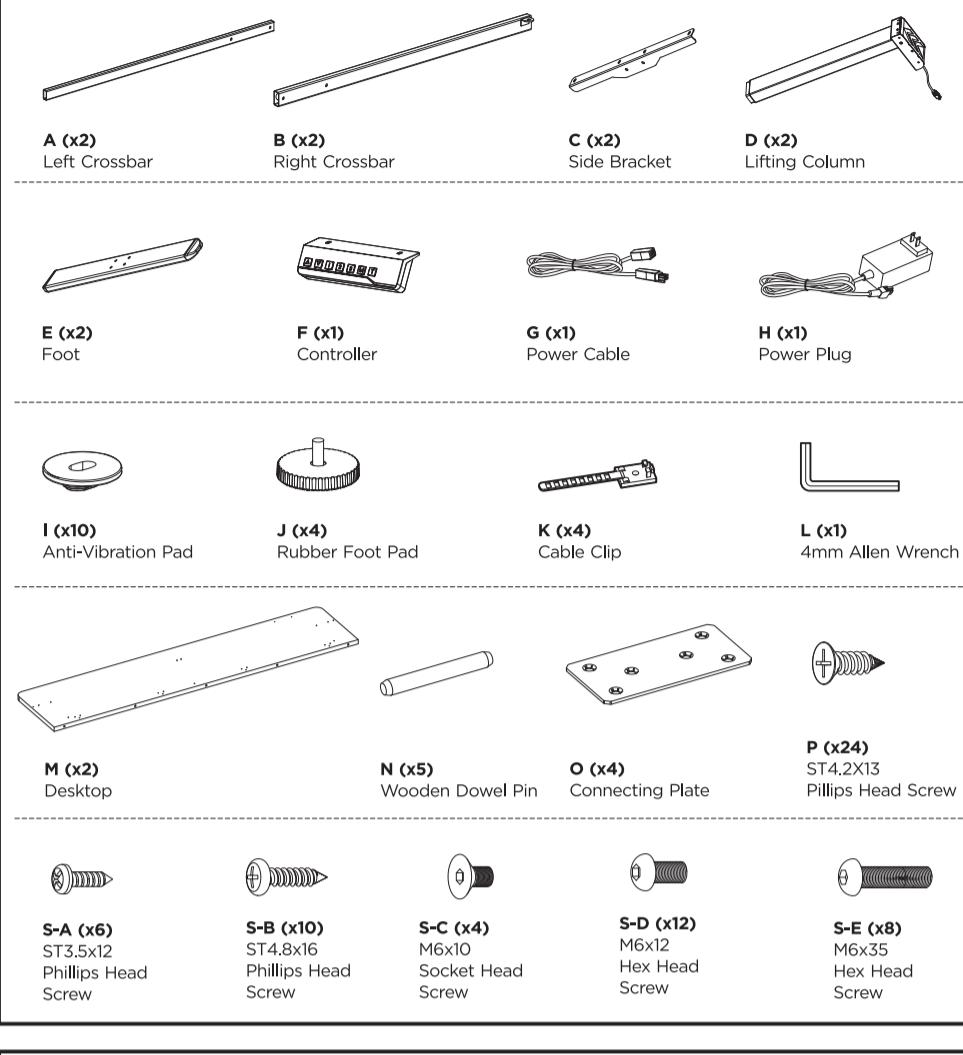


What important specifications should know before installation?




## 1. Attaching the Crossbars

- Attach the Left Crossbar **A** and the Right Crossbar **B** to the Lifting Column **D** using Screws **S-D** as shown.
- Repeat the same process to attach the other two crossbars on the other side.

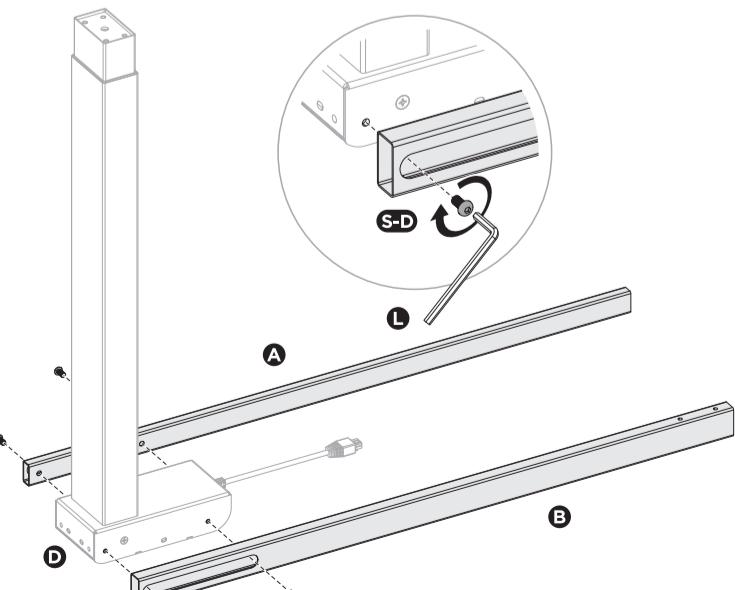


## 2. Attaching the Side Brackets

- Attach Side Bracket **C** to the Lifting Column using Screws **S-C**.
- Repeat the same process to attach the other side bracket.

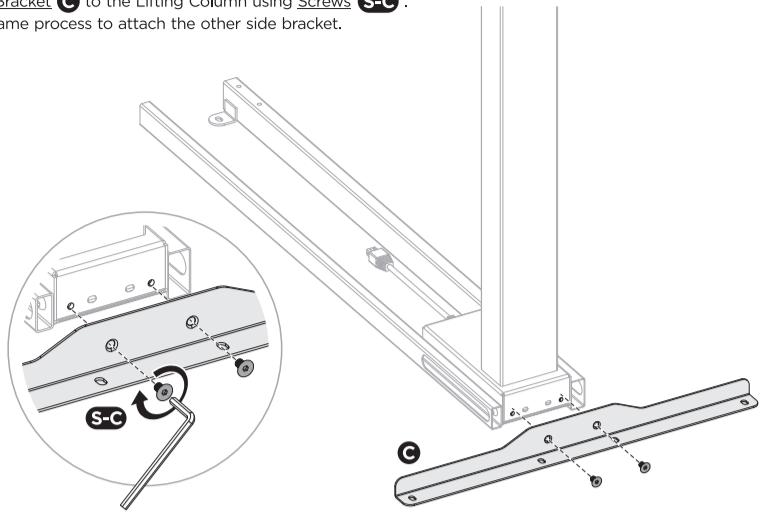


## 3. Attaching the Anti-Vibration Pads

- Attach the Anti-Vibration Pads **I** as shown below.
- Repeat the same process to attach the other Anti-Vibration Pads on the other side.

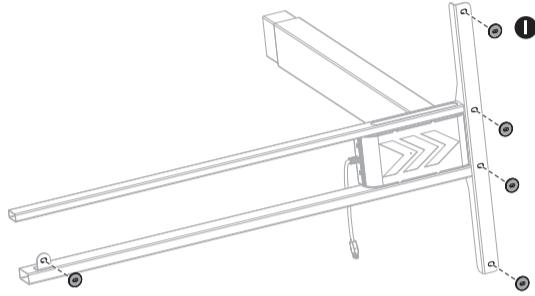

## 4. Attaching the Feet

- Attaching the Foot **E** to the Lifting Column using Screws **S-E**.
- Attaching the Rubber Foot Pad **J** to the Foot.
- Repeat the same process to attach the other foot.

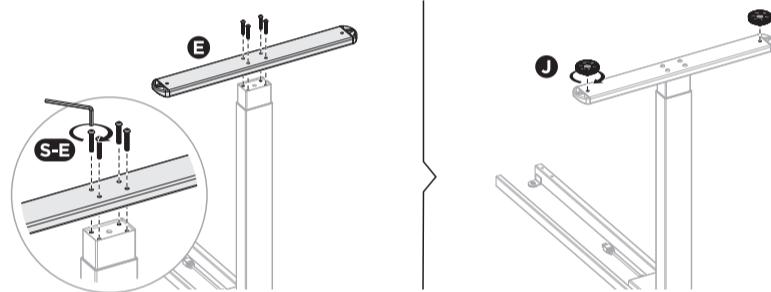


## 5. Assembling the Desktop

- Carefully place 2 pieces of Desktop **M** upside down on the floor as shown.
- Assemble the split desktop with Wooden Dowel Pins **N** and Connecting Plates **O** using Screws **P**.


**Note:**

- Please make sure the desktop pieces keep facing down while installation.

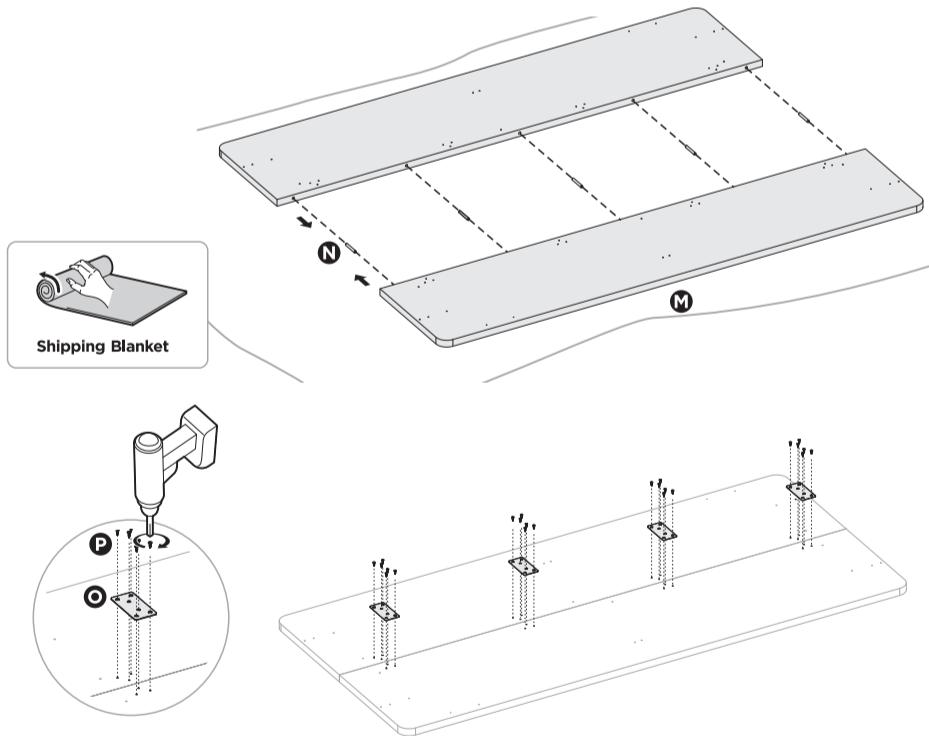


## 6. Assembling & Adjusting the Frame

- Join the Crossbars Together.
- Carefully place the desktop upside down on the blanket/floor.
- Adjust the crossbar to the size of the desktop. Ensure that the frame is placed in the center of the desktop.

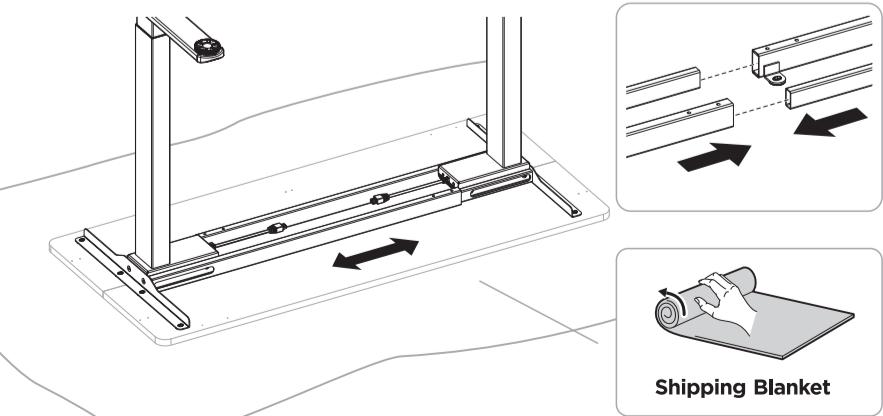

## 7. Drilling to the Desktop


- Secure the frame using Screws **S-D**.
- Attaching the assembled desk frame to the desktop through the mounting holes found on the Side Brackets and Crossbars as shown in the illustration using Screws **S-B**.

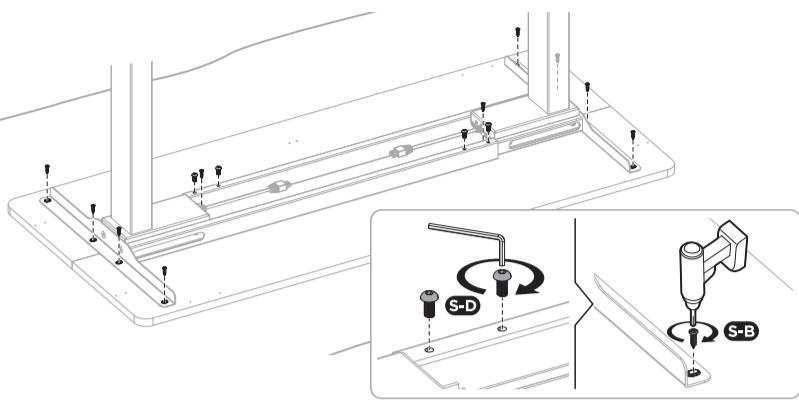

## 8. Connecting Cords


- Connect the Controller **F** with the Power Plug **H** as shown.
- Connect the Controller with 2 Lifting Columns. Use the Power Cable **G** for the Lifting Column on the far side.

**Note:**  
• Do not plug into the power before the desk is fully assembled.

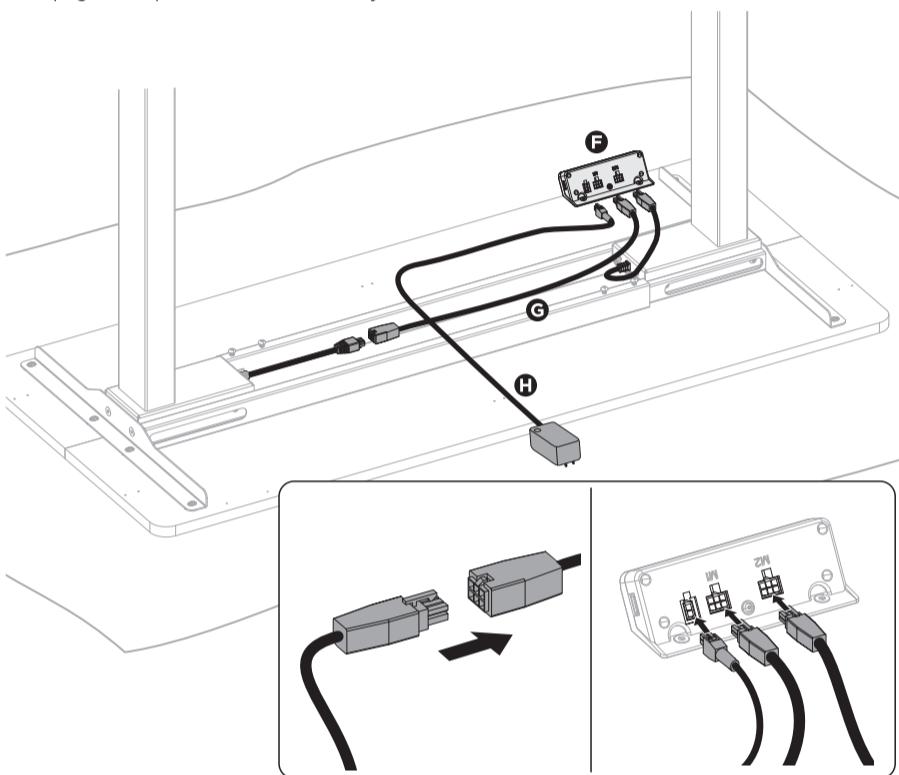


## 9. Attaching the Controller

- Attach the Controller to the desktop using Screws **S-A**.

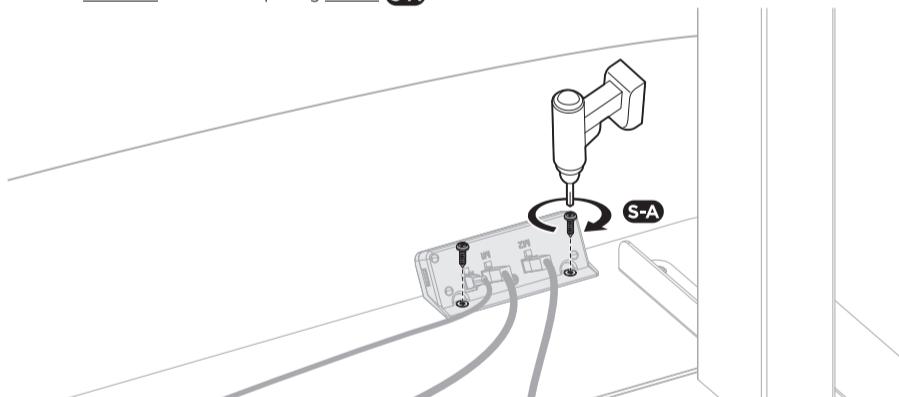



## 10. Cable Management

- Run the cables through the Cable Clips **K** and attach the Cable Clips to the desktop with Screws **S-A** to ensure clean and neat surface.

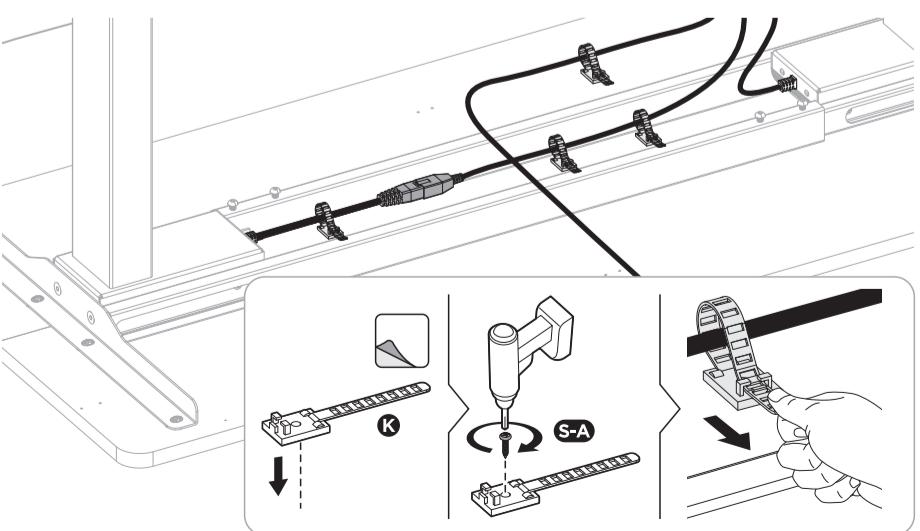

## 11. Assemble the Power Strip Holder

- Assemble the Mounting Bracket **R** and the Plates **Q** using the Screws **T** as shown.

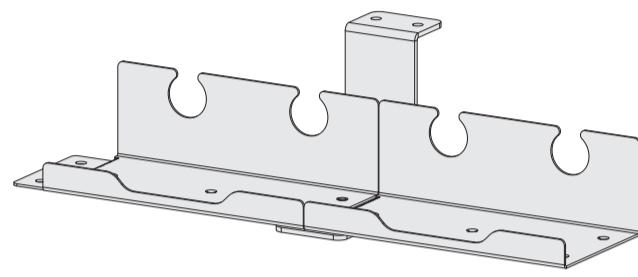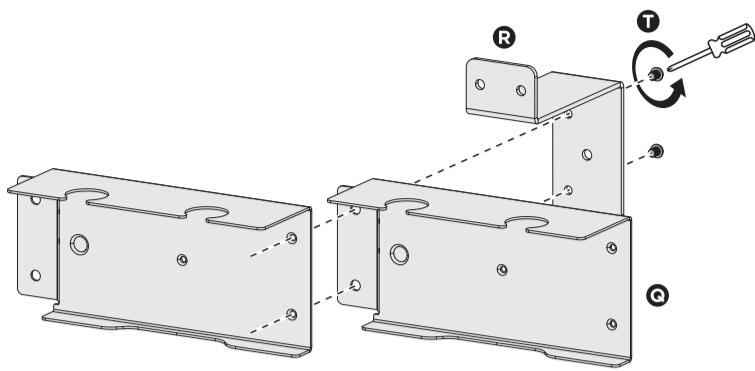

## 12. Attaching the Power Strip Holder to the Desk

- Place the power strip holder on the desk and mark the mounting holes for installation with a pencil.
- Drill the holes with a drill.
- Screw in the Screws **U** as shown.

